



# 3500 CHASSIS CAB REGULAR CAB 143.5"WB 60"CA DRW 4x4

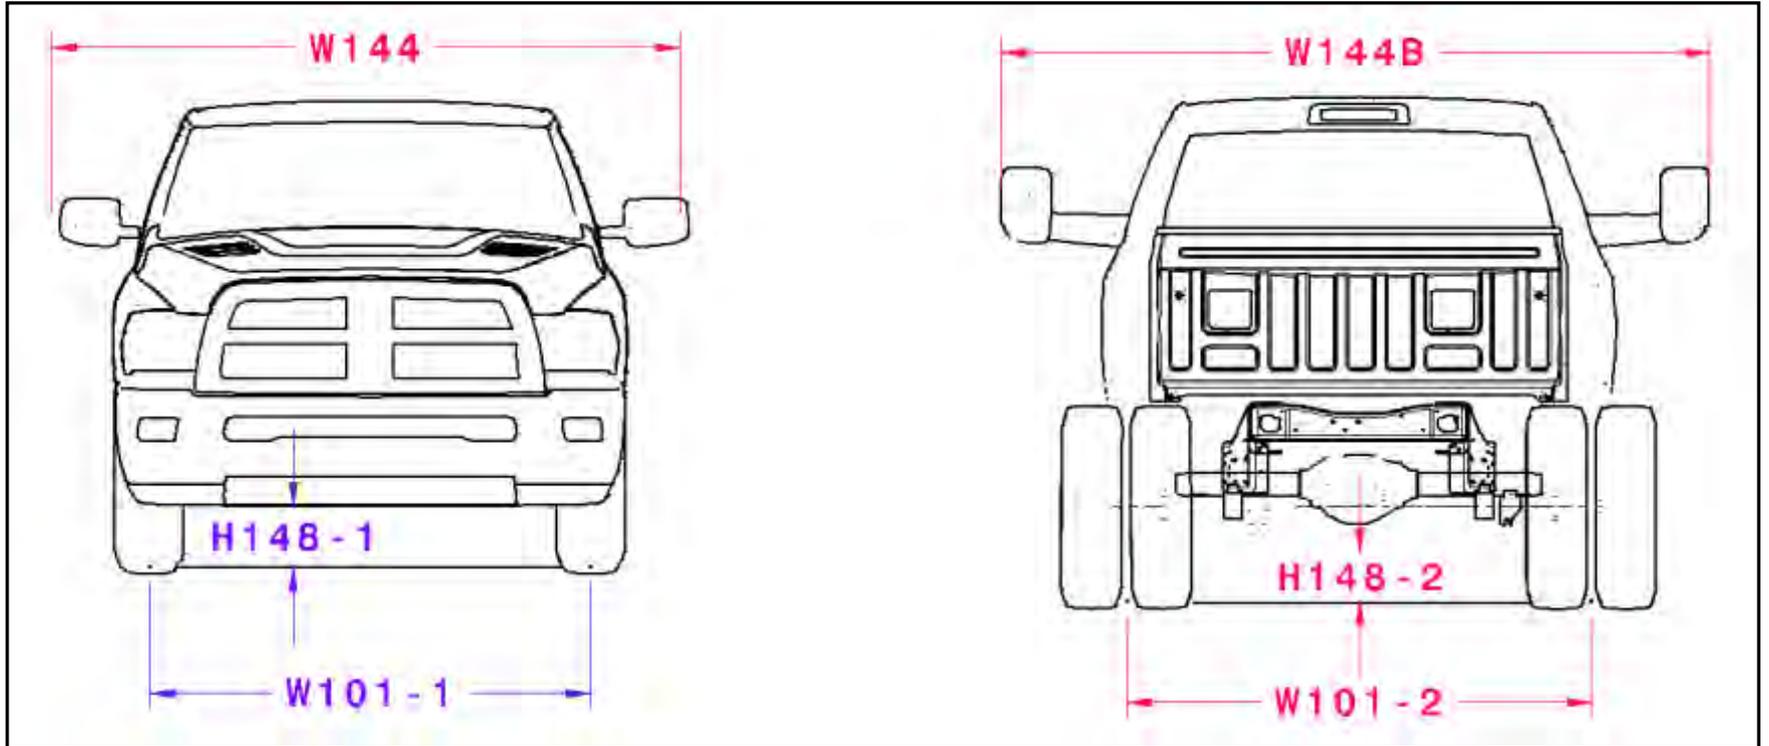

# 3500 CHASSIS CAB REGULAR CAB 143.5"WB 60"CA DRW 4x4

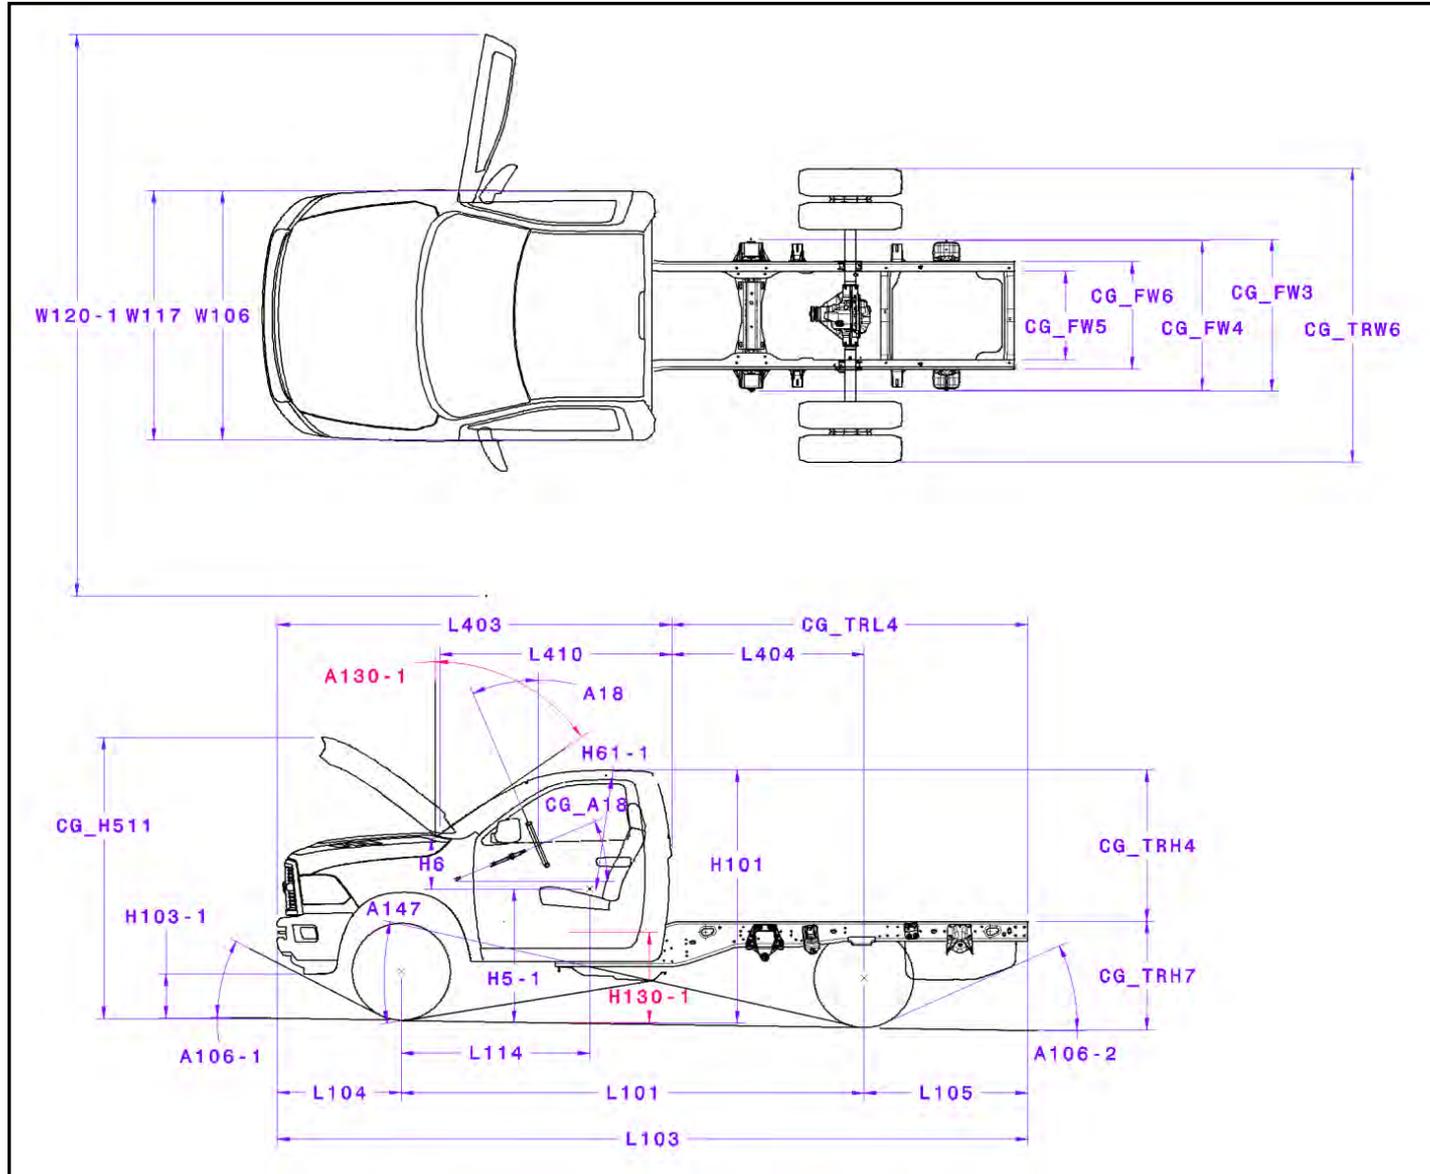

# 3500 CHASSIS CAB REGULAR CAB 143.5"WB 60"CA DRW 4x4

| Code    | Description                       | LENGTH    |          |
|---------|-----------------------------------|-----------|----------|
|         |                                   | Metric    | English  |
| CG_TRL4 | Back of Cab to Taillamp           | 2846.8 mm | 112.1 in |
| L103    | Vehicle Length                    | 5950.2 mm | 234.3 in |
| L403    | Front Bumper to Back of Cab (BBC) | 3127.0 mm | 123.1 in |
| L410    | Cab Length                        | 1839.5 mm | 72.4 in  |

| Code    | Description                          | HEIGHT    |          |
|---------|--------------------------------------|-----------|----------|
|         |                                      | Metric    | English  |
| A18     | Steering Wheel Angle                 | 22.9 deg  | 22.9 deg |
| A130-1  | Glazing Angle - Windscreen           | 56.4 deg  | 56.4 deg |
| CG_A18  | Steering Column Angle                | 23.4 deg  | 23.4 deg |
| CG_TRH4 | Top of Frame to top of Cab           | 1218.9 mm | 48.0 in  |
| H6      | SgRP - Front to Windshield Lower DLO | 458.2 mm  | 18.0 in  |
| H61-1   | Effective Head Room - Front          | 1013.5 mm | 39.9 in  |

| Code    | Description                              | WIDTH     |          |
|---------|--|-----------|----------|
|         |  | Metric    | English  |
| CG_FW3  | Rear Suspension Front Spring Bolt        | 1196.2 mm | 47.1 in  |
| CG_FW4  | Rear Suspension Rear Spring Bolt         | 1243.2 mm | 49.0 in  |
| CG_FW5  | Rear Frame - Inside Width                | 711.2 mm  | 28.0 in  |
| CG_FW6  | Rear Frame - Outside Width               | 859.6 mm  | 33.8 in  |
| CG_TRW6 | Outside of Rear Tires                    | 2338.0 mm | 92.0 in  |
| W144    | Vehicle Width-Mirrors Included (Std)     | 2464.4 mm | 97.0 in  |
| W144B   | Vehicle Width-Mirrors Included (Trailer) | 2776.1 mm | 109.3 in |
| W106    | Fender Width - Front                     | 2003.6 mm | 78.9 in  |
| W117    | Body Width At SgRP - Front               | 2005.2 mm | 78.9 in  |
| W120-1  | Vehicle Width, Doors Open - Front        | 4513.7 mm | 177.7 in |

# 3500 CHASSIS CAB REGULAR CAB 143.5"WB 60"CA DRW 4x4

| Code    | Description                           | 235/80R17 |          |
|---------|---------------------------------------|-----------|----------|
|         |                                       | Metric    | English  |
| A106-1  | Angle of Approach                     | 23.7 deg  | 23.7 deg |
| A106-2  | Angle of Departure                    | 24.6 deg  | 24.6 deg |
| A147    | Ramp Breakover Angle                  | 19.0 deg  | 19.0 deg |
| CG_H511 | Bottom of Open Hood to Ground         | 2222.6 mm | 87.5 in  |
| CG_TRH7 | Top of Frame(at rear) to Ground       | 861.3 mm  | 33.9 in  |
| CG_TT18 | Turn Circle Diameter (feet/meters)*   | 14.0 m    | 45.8 ft  |
| H5-1    | SgRP to Ground - Front                | 1044.9 mm | 41.1 in  |
| H101    | Vehicle Height(curbLoad)              | 2004.6 mm | 78.9 in  |
| H103-1  | Fascia(Bumper) to Ground - Front      | 310.6 mm  | 12.2 in  |
| H108-1  | Static Load Radius - Front Tire *     | 382.5 mm  | 15.1 in  |
| H108-2  | Static Load Radius - Rear Tire *      | 395.3 mm  | 15.6 in  |
| H115-1  | Step Height - Front                   | 688.8 mm  | 27.1 in  |
| H148-1  | Suspension or Axel to Ground - Front  | 224.2 mm  | 8.8 in   |
| H148-2  | Suspension or Axel to Ground - Rear   | 206.7 mm  | 8.1 in   |
| L101    | Wheelbase                             | 3646.0 mm | 143.5 in |
| L104    | Overhang - Front                      | 1005.3 mm | 39.6 in  |
| L105    | Overhang - Rear                       | 1298.8 mm | 51.1 in  |
| L114    | Front Wheel Centerline toSgRP - Front | 1471.6 mm | 57.9 in  |
| L404    | Cab to Rear Axle (CA)                 | 1524.3 mm | 60.0 in  |
| W101-1  | Tread Width - Front Tires             | 1768.0 mm | 69.6 in  |
| W101-2  | Tread Width - Rear Tires              | 1825.0 mm | 71.9 in  |